


JFBB 自润滑翻边轴承 JFBB Flanged Bushing

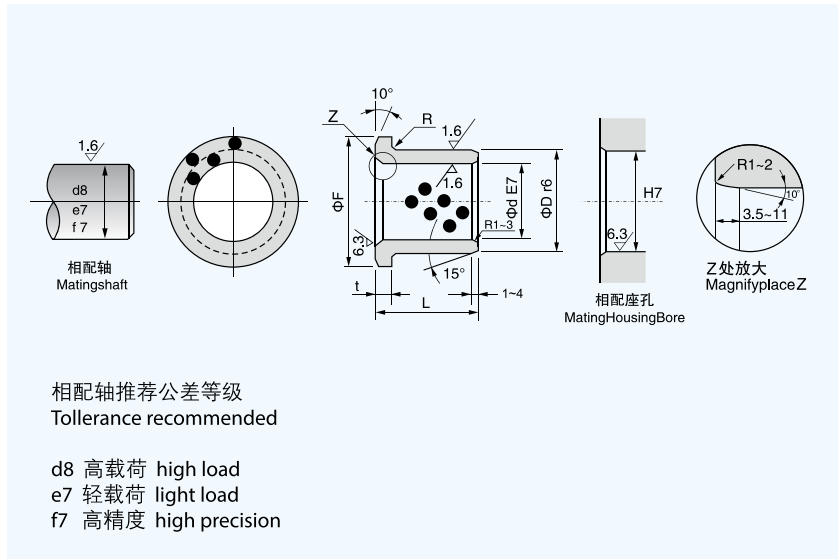

材料: 高力黄铜/青铜+固体润滑剂
Material: CuZn25Al5Mn3Fe3/CuZn5Sn5Pb5/
CuSn12/CuAl10Ni5Fe5+Graphite(500#SP)
相配座孔公差等级推荐H7
Housing tolerance recommended H7

单位unit:mm

Part No. 产品代号	I.D. Φd 内径 E7	O.D. ΦD 外径 r6	ΦF	t	L ^{-0.10} L _{-0.30}	装压后 内孔
JFBB-1211	12 ^{+0.050} / _{+0.032}	18 ^{+0.034} / _{+0.023}	30 ⁰ / _{-0.3}	3 ⁰ / _{-0.03}	11	+0.031 +0.013
JFBB-1223	"	"	"	"	23	"
JFBB-1513	15 ^{+0.050} / _{+0.032}	21 ^{+0.041} / _{+0.028}	35 ⁰ / _{-0.3}	"	13	+0.026 +0.008
JFBB-1613	16 ^{+0.050} / _{+0.032}	22 ^{+0.041} / _{+0.028}	"	"	13	"
JFBB-1618	"	"	"	"	18	"
JFBB-1818	18 ^{+0.050} / _{+0.032}	24 ^{+0.041} / _{+0.028}	40 ⁰ / _{-0.3}	"	18	"
JFBB-2020	20 ^{+0.061} / _{+0.040}	28 ^{+0.041} / _{+0.028}	45 ⁰ / _{-0.3}	5 ⁰ / _{-0.03}	20	+0.037 +0.016
JFBB-2025	"	"	"	"	25	"
JFBB-2520	25 ^{+0.061} / _{+0.040}	33 ^{+0.050} / _{+0.034}	50 ⁰ / _{-0.3}	"	20	+0.032 +0.011
JFBB-2525	"	"	"	"	25	"
JFBB-3025	30 ^{+0.061} / _{+0.040}	38 ^{+0.050} / _{+0.034}	55 ⁰ / _{-0.3}	"	25	"
JFBB-3035	"	"	"	"	35	"
JFBB-3525	35 ^{+0.075} / _{+0.050}	44 ^{+0.050} / _{+0.034}	62 ⁰ / _{-0.3}	"	25	+0.046 +0.021
JFBB-3535	"	"	"	"	35	"
JFBB-4027	40 ^{+0.075} / _{+0.050}	50 ^{+0.050} / _{+0.034}	70 ⁰ / _{-0.3}	7 ⁰ / _{-0.03}	27	"
JFBB-4037	"	"	"	"	37	"
JFBB-4047	"	"	"	"	47	"
JFBB-5038	50 ^{+0.075} / _{+0.050}	62 ^{+0.060} / _{+0.041}	90 ⁰ / _{-0.3}	8 ⁰ / _{-0.04}	38	+0.040 +0.015
JFBB-5048	"	"	"	"	48	"
JFBB-5058	"	"	"	"	58	"
JFBB-6038	60 ^{+0.090} / _{+0.060}	74 ^{+0.062} / _{+0.043}	110 ⁰ / _{-0.3}	"	38	+0.053 +0.023
JFBB-6068	"	"	"	"	68	"
JFBB-7050	70 ^{+0.090} / _{+0.060}	85 ^{+0.073} / _{+0.051}	120 ⁰ / _{-0.3}	10 ⁰ / _{-0.04}	50	+0.046 +0.016
JFBB-7080	"	"	"	"	80	"
JFBB-8060	80 ^{+0.090} / _{+0.060}	96 ^{+0.073} / _{+0.051}	140 ⁰ / _{-0.3}	"	60	"
JFBB-8090	"	"	"	"	90	"

How to order: Part No. d L
订单方式: JFBB 12 11

可专门定制规格尺寸及材料
装压后内孔公差值仅作参考!